





RC-6iR

6-Button Universal Room Controller with IR Learning

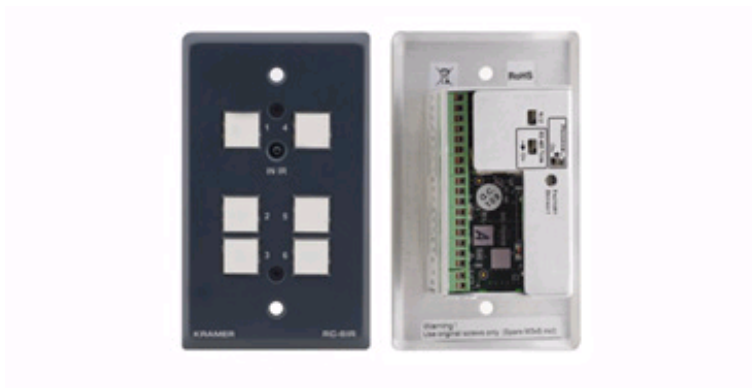

The **RC-6iR** is a 6-button room controller for multimedia rooms. It controls audio components, video components, and other room facilities such as lights and screens.

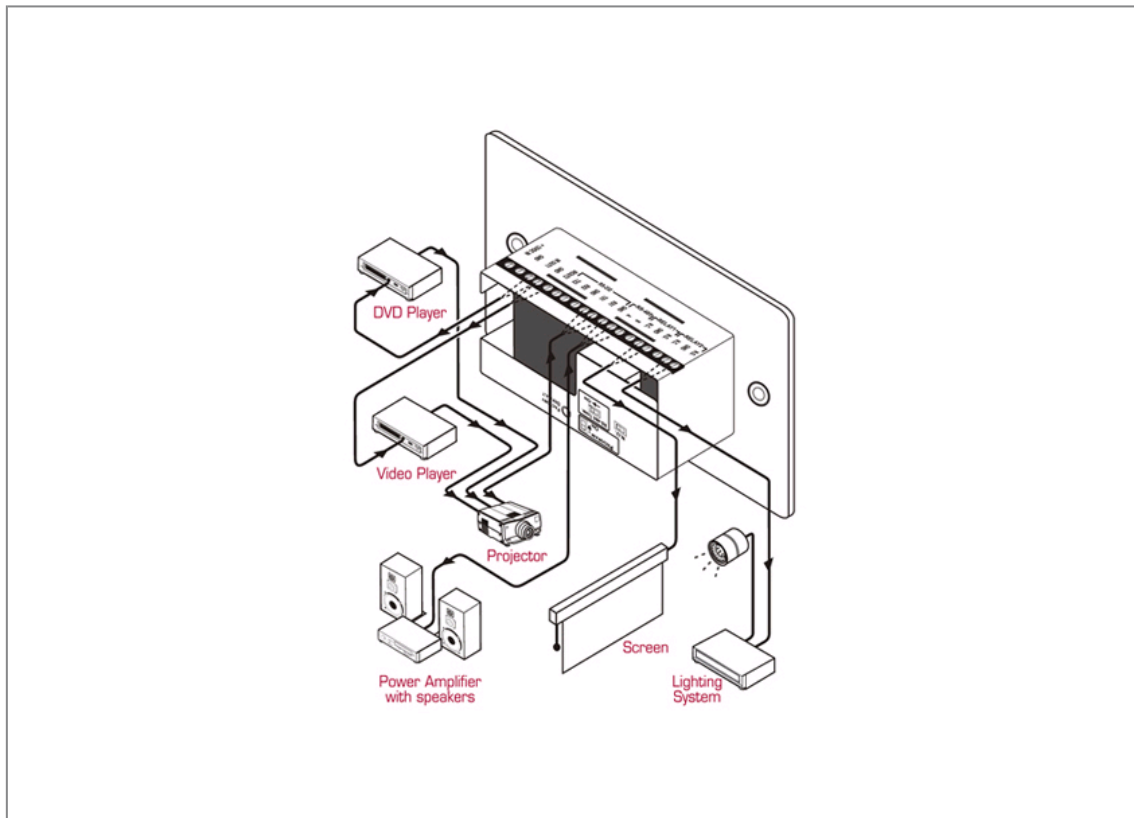



RC-6iR

FEATURES

- **6 Back Lit & Label Capable Buttons** - 15 commands per button - up to 90 total commands in a 1 Gang wall plate.
- **Ethernet Port** - Allows for easy setup with Kramer's included user friendly and intuitive RC Configuration software as well as control of the unit from an Internet connection anywhere in the world.
- **IP Control from the Ethernet Port** - Control up to 5 networked AV devices from the Ethernet port.
- **2 IR Ports**
- **IR Learning Function** - Learn commands from IR remotes.
- **2 Relay Contact Closure Ports** - Conveniently control other room items related to the AV system such as raising and lowering drapes, the screen or the projector.
- **2 Bi-directional RS-232 and 1 RS-485 Ports** - Control up to three additional devices via serial control protocols.
- **Lock Out Feature** - The RC-6iR can be locked and unlocked to prevent tampering.
- **Wall Plate** - 1 Gang U.S.A., 2 Gang EU.

TECHNICAL SPECIFICATIONS

PORTS:	2 RS-232 on terminal block connectors; 1 RS-485 on terminal block connectors; 1 ETHERNET RJ-45 port.
OUTPUTS:	2 relays on terminal block connectors (36V AC or DC, 2A, 60V AC maximum on non-inductive load); 2 IR emitters on terminal block connectors.
POWER SOURCE:	12V DC, 155mA.
DIMENSIONS:	11.4cm x 4.3cm x 6.9cm (4.49" x 1.70" x 2.72") W, D, H.
WEIGHT:	0.3kg (0.67lbs) approx.
ACCESSORIES:	Kramer 3.5mm to IR Emitter Control Cable (C-A35/IRE-10), power supply, two extra M3x5 screws, Java based control software (internal), Windows®-based Kramer RC configuration software.
OPTIONS:	Kramer 3.5mm to IR Emitter Control Cable (C-A35/IRE-10), Kramer 3.5mm to Dual IR Emitter Control Cable (C-A35/2IRE-10), 15m and 20m IR emitter extension cables.