




## VP-728

### 9-Input ProScale™ Presentation Scaler/Switcher



The **VP-728** is a 9-input scaler/switcher for analog and digital video, unbalanced stereo, and S/PDIF audio signals. It scales any video signal composite, s-Video (Y/C), component video (YUV), HDMI, computer graphics video and JPEG files) up or down to a selectable graphics or HDTV output resolution via HDMI or 15-pin HD outputs. It provides glitch-free switching between sources through FTB™ (fade thru-black) switching technology.

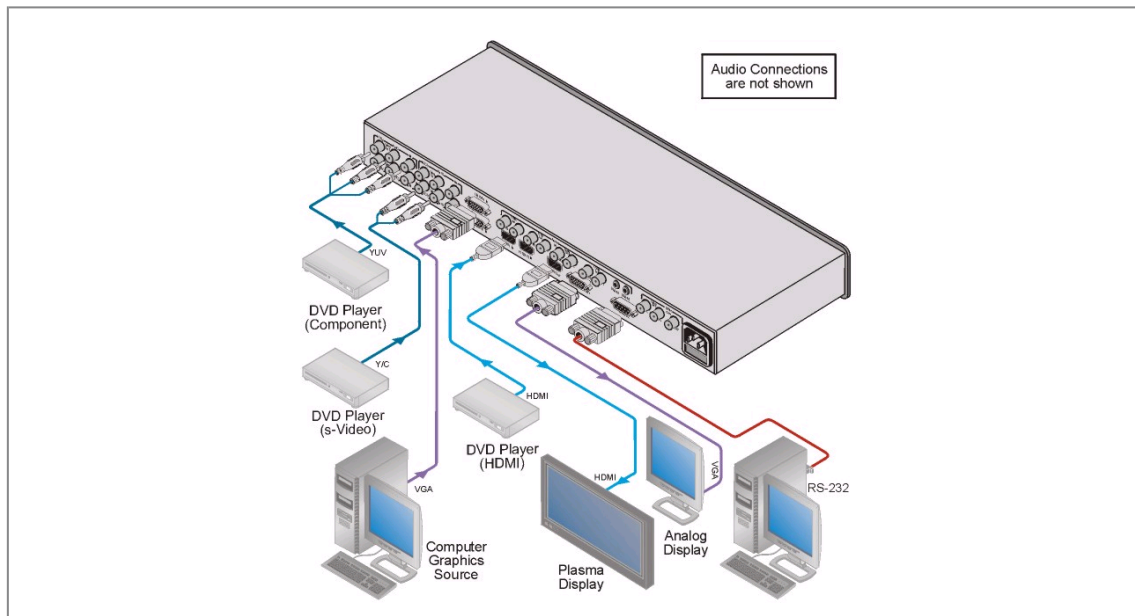



## VP-728

---

### FEATURES

---

- **HQV® Video Processing** - HQV (Hollywood Quality Video) processing represents the state-of-the-art in video processing technology, with the highest quality de-interlacing, noise reduction, and scaling performance for both standard-definition and high-definition signals.
- **Fade-Thru-Black (FTB™) Switching**. The video fades to black and then the new input fades from black for smooth, glitch-free switching. The output signal provides constant sync so the display never glitches.
- **K-IIT XL™ Picture-in-Picture Image Insertion Technology** - Ultra stable picture-in-picture, picture-and-picture, and split screen capability. Any video source can be inserted into or positioned next to a computer graphics video source or vice versa with window positioning and sizing controls.
- **Projector Anywhere™ Technology** - Horizontal & vertical geometry controls to compensate for off-axis projector placement.
- **HDTV Compatible.**
- **HDCP Compliant** - The HDCP (High Definition Content Protection) license agreement allows copy-protected data on the HDMI input to pass only to the HDMI output.
- **Video Inputs** - 4 universal video each on 3 RCA (composite, s-Video, component), 2 computer graphics video (15-pin HD), 2 HDMI and 1 USB (for JPEG data).
- **Multi-Standard** - Auto, NTSC (3.58/4.43), PAL (M/N/60) & SECAM.
- **HDTV Compatible Component Input.**
- **Scaled Video Outputs** - HDMI & 15-pin HD.
- **HDTV Output Resolutions** - 720p, 1080i, and 1080p.
- **Computer Graphics Output Resolutions** - 23 plus a user definable custom output resolution with selectable refresh rates.
- **Multiple Aspect Ratio Selections.** - 4x3 or 16x9, anamorphic, letter box, and user definable settings.
- **Companion AFV (Audio-Follow-Video) for Every Analog Video Input** - Supports embedded audio on the 2 HDMI inputs and outputs.
- **Audio Inputs** - 4 (stereo audio or S/PDIF on 2 RCAs) for each of the 4 universal video inputs, 2 stereo audio (on 3.5mm) for the 2 computer graphics video inputs. Each with level adjustment.
- **Audio Outputs** - S/PDIF and stereo audio (RCAs). Transcodes stereo or S/PDIF audio to both stereo and S/PDIF audio and embeds audio onto the HDMI output. Master volume control.
- **Audio Delay** - Adjustable from 0 to 340msec.
- **Built-in Time Base Corrector** - Stabilizes unstable video sources.
- **Built-in ProcAmp** - Color, hue, sharpness, contrast, and brightness are set individually for each input.
- **Text Overlay.**
- **Front Panel Lockout.**
- **Front Panel Freeze Frame.**
- **Video Blanking** - Blue or black screen selectable.
- **Zoom** - 100% to 400%.
- **Flexible Control Options** - Front panel, IR Remote (with on-screen menus) & RS-232.
- **Worldwide Power Supply** - 100-240V AC.
- **Standard 19" Rack Mount Size** - 1U. Rack "ears" included.



## VP-728

---

### TECHNICAL SPECIFICATIONS

---

INPUT:	4 universal Y/CV, Pb/C, Pr (composite, s-Video and component) 1 Vpp/75Ω on RCA connectors; 2 UXGA on a 15-pin HD (F) connector (VGA through UXGA); 2 HDMI connectors; 1 USB connector; For each universal input there is a corresponding (unbalanced) audio stereo input and digital S/PDIF input on RCA connectors; For each UXGA input there is a corresponding (unbalanced) audio stereo input on a 3.5mm mini jack connector.
OUTPUTS:	1 HDMI connector; 1 UXGA on a 15-pin HD connector; 1 unbalanced audio stereo output on RCA connectors; 1 digital S/PDIF output on an RCA connector.
COMPLIANCE WITH HDMI STANDARD:	Supports HDMI 1.3 and HDCP.
OUTPUT RESOLUTION:	Native HDMI, 640x480 (60/75Hz), 800x600 (50/60/75Hz), 1024x768 (50/60/75Hz), 1280x768 (50/60Hz), 1280x800 (60Hz), 1280x1024 (50/60/75Hz), 1366x768 (50/60Hz), 1400x1050 (50/60Hz), 1600x1200 (50/60Hz), 1680x1050 (60Hz), 1920x1080 (60Hz), 1920x1200 (60Hz), 480p (60Hz), 576p (60Hz), 720p (50/60Hz), 1080i (50/60Hz), 1080p (50/60Hz) or Custom.
CONTROL:	Front panel buttons, OSD, IR remote control, RS-232 on a 9-pin D-sub connector.
ADDITIONAL CONTROLS:	Freeze, zoom, different selectable vertical refresh rates, video and audio ProcAmp control, output image scaling and aspect ratio change, picture-in-picture, picture-and-picture, text overlay.
POWER SOURCE:	100-240V AC, 50/60Hz, 30VA automatic power supply.
DIMENSIONS:	19" x 7" x 1U W, D, H, rack mountable.
WEIGHT:	3kg (6.6lbs) approx.